

MasTTer

Circular saw blade for panel sizing

Superior performance with excellent finishes

Designed to work with high-speed cutting machines, Frezite presents the new range of MasTTer saws. Developed for high-precision cuts, they guarantee excellent finishes on wood-based panels. These saw blades are suitable for both single cuts and batch production. They ensure greater durability and efficiency, guaranteeing consistent results, even in high-performance applications.



TECHNICAL INFORMATION

- **Rigorous selection of raw materials:** tungsten carbide (HW) with high wear resistance.
- **Innovative cutting geometry of the teeth:** trapezoid-trapezoid, ensuring greater cutting quality.
- **Variable pitch:** the saw has a variable pitch, which contributes to vibration reduction and excellent finishes.
- **Soundproofing slots** and variable pitch to reduce noise during operation.

APPLICATION


- For single or batch cutting of wood-based panels (with or without coating).

ADVANTAGES

- **Durability:** high-strength materials that extend the longevity and lifetime of the saw between sharpenings.
- **Acoustic performance:** low noise thanks to the saw's innovative design, which provides more silent operations.
- **High quality finishes:** guarantees an excellent finish in operations that require high performance.

MACHINES

- For panel sizing.

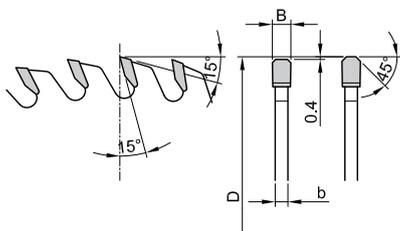


HW

TT



Saws with variable pitch

D	B	b	d	Z	NL/TK	Machines	Ref.
310	4,4	3,2	60	72	NL60	Homag	873.310.172.60
320	4,4	3,2	30	72	NL75	Homag CV	873.320.172.30
	4,4	3,2	65	72	NL65	Selco, Nimac, Cehisa	873.320.172.65
	4,4	3,2	75	72	NL75	Giben	873.320.172.75
350	4,4	3,2	30	72	NL30	Mayer, Tecmatic, Panhans, Scherr	873.350.272.30
355	4,4	3,2	30	72	NL30+2/9/110	Panhans, SCM, Turanlar	873.355.172.30
	4,4	3,2	65	72	NL65	Selco, Cehisa	873.355.372.65
	4,4	3,2	75	72	NL75	Giben	873.355.172.75
360	4,4	3,2	65	72	NL65	Nimac, Selco, Cehisa	873.360.172.65
380	4,4	3,2	60	72	NL60	Holzma, Homag	873.380.372.60
	4,4	3,2	65	72	NL65	Biesse, Selco, Cehisa	873.380.172.65
	4,8	3,5	60	72	NL60	Holzma, Homag	873.380.272.60
430	4,4	3,2	75	72	NL75	Giben	873.430.472.75
450	4,8	3,5	60	72	NL60	Holzma, Homag, Anthon	873.450.372.60
470	4,8	3,5	70	72	NL70	Biesse, Selco	873.470.372.70
520	4,8	3,5	70	72	NL70	Selco WNT 750	873.520.072.70

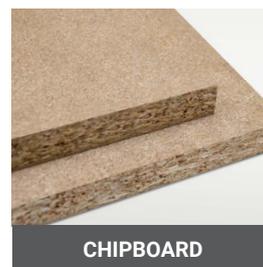

D – Cutter diameter
B – Cutter width

b – Body thickness
d – Bore

Z – Edges
NL/TK – Pinhole/Diameter for pin holes

TT – Trapezoidal tooth - trapezoidal

